


Lithium SuperPack NG

www.victronenergy.com



Lithium SuperPack 12,8/100 NG

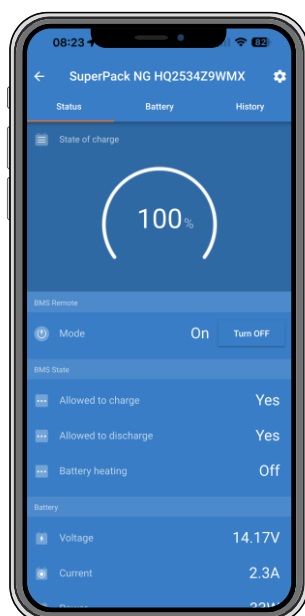


Live battery data displayed in VictronConnect


The Lithium SuperPack NG battery is a drop-in replacement for standard lead-acid batteries in RVs and recreational vehicles. Designed for extended off-grid use, it provides ample capacity to power the complete electrical system, including high-demand appliances. Its form factor and terminal layout ensure easy installation in a wide range of vehicles such as large trucks, SUVs, and RVs.

Features

- **Bluetooth monitoring and control** Includes Bluetooth Smart for wireless configuration, monitoring, and firmware updates via the **VictronConnect App**. The Instant Readout function displays key data such as state of charge (SoC), battery temperature, warnings, and alarms directly in the device list without the need to connect.
- **Built-in BMS and battery monitor**: Integrates cell balancing, protection, and monitoring functions to ensure optimal performance and safety throughout the battery's service life.
- **External Feedback Signal (EFS)**: Provides a battery voltage signal limited to 250 mA. The EFS signal serves as an External Disconnection Signal (EDS) to trigger an event for redundant system protection. Additionally, the EFS can be configured as an External Charging Signal (ECS), based on the low SoC pre-alarm threshold, to activate a charger start signal.
- **Self-heating function**: Maintains the battery temperature above the minimum safe charging limit to ensure reliable operation in cold environments. Two heating modes are available:
 - **Charger mode**: the heater is powered by the connected charger and activates automatically when the cell temperature drops below 0 °C before charging (default).
 - **Auto mode**: The battery powers the heater to keep the cells above 0 °C for immediate charging. This is limited by the battery's internal energy; if SoC falls below the Low SoC threshold, the heater is disconnected and charging remains unavailable.
- **LED status indication**: Two integrated LEDs indicate Bluetooth connectivity, warning and alarm conditions, or firmware update status.
- **On/Off push button**: Push button for switching the battery on or off, disabling both charging and discharging functions.
- **High efficiency**: Operating efficiency 93 %.
- **Parallel connection**: Supports parallel connection of an unlimited number of batteries to increase total energy capacity. The total system current is limited by the maximum current a single battery can safely interrupt.
- **Configurable discharge floor**: Defines a minimum state of charge to avoid excessive discharge while keeping reserve capacity. When the limit is reached, VictronConnect shows a Low SoC alarm and the Allowed to Discharge (ATD) indicator turns off until the state of charge rises above the set threshold.

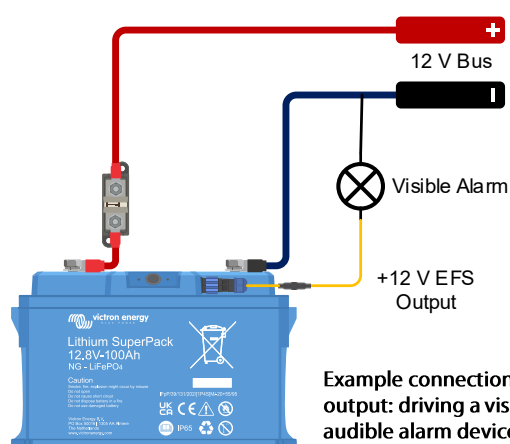

Example connection of the EFS signal output: driving a visible and an audible alarm device.

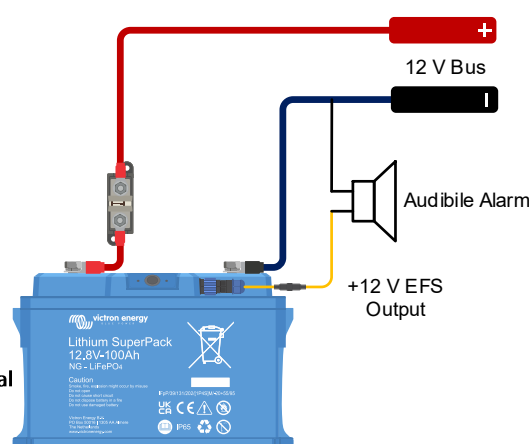

Available on E-Order by Q1 2026	SuperPack NG				
Model	SuperPack 12,8V/100Ah NG	SuperPack 12,8V/200Ah NG	SuperPack 25,6V/100Ah NG	SuperPack 25,6V/200Ah NG	SuperPack 51,2V/100Ah NG
Part Number	BAT512110740	BAT512120740	BAT524110740	BAT524120740 ¹⁾	BAT548110740 ¹⁾
Nominal voltage	12,8V		25,6 V		51,2 V
Nominal capacity @ 25 °C ²⁾	100 Ah	200 Ah	100 Ah	200 Ah	100 Ah
Nominal energy @ 25°C ²⁾	1280 Wh	2560 Wh		5120 Wh	
Capacity loss / Energy loss	(per 100 cycles, @ 25 °C, 100 % DoD): <1%				
Round Trip Efficiency ³⁾	93 %				
CYCLE LIFE 25 °C(capacity ≥ 80% of nominal)					
Cycle life @ 80 % DoD and 25 °C	2500 cycles				
Cycle life @ 70 % DoD and 25 °C	3000 cycles				
Cycle life @ 50 % DoD and 25 °C	5000 cycles				
DISCHARGE					
Max continuous discharge current	100 A	200 A	100 A	200 A	100 A
Max pulse discharge current (300s)	200 A	400 A	200 A	400 A	200 A
End of discharge voltage	11,2 V		22,4 V		44,8 V
Internal resistance	2 mΩ	1 mΩ	4 mΩ	2 mΩ	8 mΩ
CHARGE					
Recommended Charge voltage	14 V		28 V		56 V
Float voltage	13,5 V		27 V		54 V
Charge voltage range	[13,5 - 14,2] V		[27 - 28,4] V		[54V - 56,8]V
Max continuous charge current	100 A	200 A	100 A	200 A	100 A
Max pulse charge current (60s)	150 A	300 A	150 A	300 A	150 A
FEATURES					
Short protection in hardware / System Max Current	800 A				
Software protections	Overvoltage, Undervoltage, Overtemperature, Undertemperature, Overcurrent				
Wired Communication	External Feedback Signal (EFS)				
Bluetooth	Yes, VictronConnect App				
User Interface	Push button (On/Off), BLE LED, Status LED				
Self-Heating Function	Yes				
OPERATING CONDITIONS					
Parallel configuration	Yes, unlimited energy expansion, with power expansion limited to the system's maximum current				
Series configuration	No				
Operating temperature	Charge and Discharge: -20 °C to +55 °C				
	-20 °C to +55 °C				
Humidity Operating Range (non condensing)	<90 % RH				
Storage temperature	Recommended [10 - 35] °C Expanded [-40 to +65] °C ⁴⁾				
Max storage time @ 25°C	1 year with at least initial remaining SoC>50%				
Protection class	IP65				
MOUNTING					
Power connection (threaded insert)	M8 female 20 mm including nut screws				
Mounting options	Upright and on its long side, maintain flat horizontal support				
Dimensions [LxWxH] (mm) ⁵⁾	273 x 173 x 173 ⁶⁾	466 x 198 x 173		871 x 198 x 173	
Weight (kg)	10,7	20,5		41	
External Feedback Signal (EFS) Connector	SD13ZMK01				
STANDARDS					
Safety	Cells: UL1973 UL9540A IEC62619				
	Battery: IEC62619-2 (pending)				
EMC	EN 61000-6-3, EN 61000-6-2				
Performance	IEC62620 (pending)				
Transportation	UN38.3				
Automotive	ECE R10 (pending)				
Notes	¹⁾ Product launch after Q1 2026 ²⁾ Discharge current ≤1C ³⁾ 25 °C and 0.5C cycling ⁴⁾ Performances might be reduced ⁵⁾ Additional height of 15 mm for terminal screws ⁶⁾ Compatible with BCI Group 49 dimensions				